





## BEACON TEST PROCEDURE


1. Install Battery Pack into the NXT

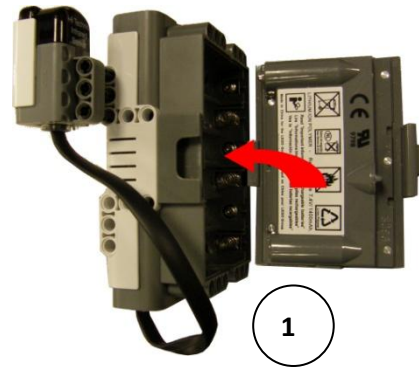

2. Connect the AC Adaptor to the bottom of the NXT.



3. Press the orange square to turn the NXT on. Wait for the start up routine to finish and "My Files" to display on the view screen..
4. Press the orange square 4 times. The program will display as shown.

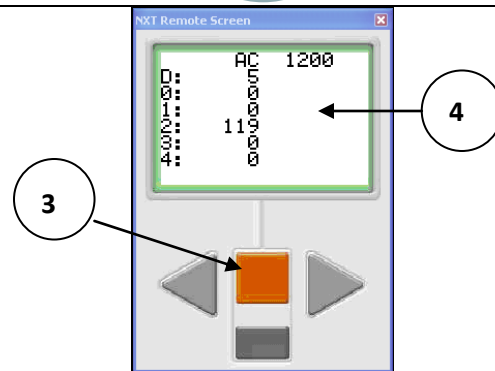

5. Mount the beacon to a vertical surface for testing.
6. Switch the toggle on the beacon to the ON position.
7. Hold the NXT approximately 24" from the beacon as shown.
8. A reading of 100 or better should show on line 2 of the display.

To turn off the NXT, press the gray rectangle 5 times, then the orange button 1 time.

